

PLD Series

Mod D.E. Aboveground System
by Sta-Rite®




The advantages are distinctly clear

Family, friends and even Fido can put a strain on your pool filtration system. Keeping your water in perfect condition is a job best left to Sta-Rite®, the leader in filtration technology. To enjoy the cleanest, clearest water in your backyard pool, install a PLD Mod D.E. aboveground system, featuring diatomaceous earth (D.E.) filtration. Diatomaceous earth, a natural substance, is so fine it traps dirt and debris as small as five microns ($1/10$ the width of a human hair). Body oils, suntan lotions, pollens, dust and even some bacteria are trapped in the filter, leaving behind sparkling clear, healthier water.

- Single module replaces complicated multi-grid assemblies that are difficult to clean and reassemble.
- Unique balanced-flow tank design maximizes the use of the module's surface area to trap more dirt and reduce the frequency of cleaning.
- Precision-engineered pump components significantly reduce sound levels and won't intrude on those peaceful, quiet times.

The advantages are perfectly clear. Enjoy the distinct benefits of the PLD Mod D.E. aboveground system.

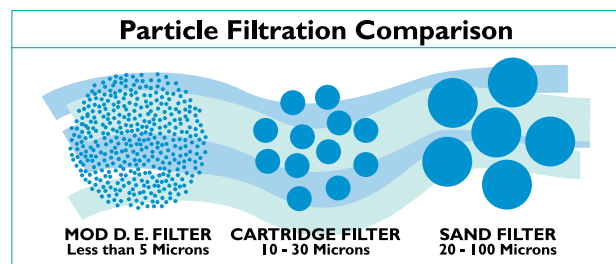

PLD Series

Mod D.E. Aboveground System



- Top-mounted pressure gauge and information panels are positioned for easy reading
- Split tank design permits rinse-in-place cleaning—super simple to achieve thorough cleaning fast
- Posi-Ring® closure is safe, easy to secure properly every time, and lasts for years
- System available with Sta-Rite® OptiFlo® Series aboveground pumps

A dynamic duo

The PLD Mod D.E. aboveground system incorporates a performance-matched pump and filter, which increase energy efficiency and reduce sound emissions. And, with your leisure time in mind, the components are designed to need only occasional maintenance.



Less maintenance . . . YES!

The balanced-flow tank design directs water through both sides of the filter module, which dramatically increases filter surface area and dirt-loading capability. And that means a longer time between cleanings.



Easy cleaning

For quick cleaning, simply remove the tool-free tank lid and spray-rinse the module* while it's still in place. In minutes, it's ready for another season.

*Modules used in conjunction with certain pool/spa sanitizers may require soaking in special cleaning solutions.

Filter Performance

Model	Pump (HP)	Filter Area (Sq. Ft.)	For Pools up to (Gal.) 8 Hr. Turnover	D.E. Required ¹ (lbs.)
SRPLD0500E	1	30	29,000	6

¹Do not use more D.E. than shown here. Mixed results with D.E. alternatives.

Operating Limits – Maximum continual operating pressure is 50 PSI. For pool/spa (bather) applications, the maximum operating water temperature within the filter is 104°F (40°C).

One-year limited warranty. See warranty for details.

Available from:



Simply Smarter.

www.staritepool.com

Phone: 800-831-7133

